

Mini-Fit Jr. Double Crimp Tools >

Mini-Fit Jr. Double Crimp Tools allow for cost savings and quick set-up time. The Molex Fine Adjust Applicator, for Mini-Fit Double Crimp applications, allows for significant time savings as it does not require removal from the press in order to make height, track or feed adjustments.


FEATURES AND ADVANTAGES

Quick punch removal with the push of a button

Allows for fast and easy tooling change

Fine adjustment option


Gives users the ability to achieve target with little effort by adjusting in increments of 0.15mm (.0006") for conductor crimp height and 0.063mm (.0025") for insulation height

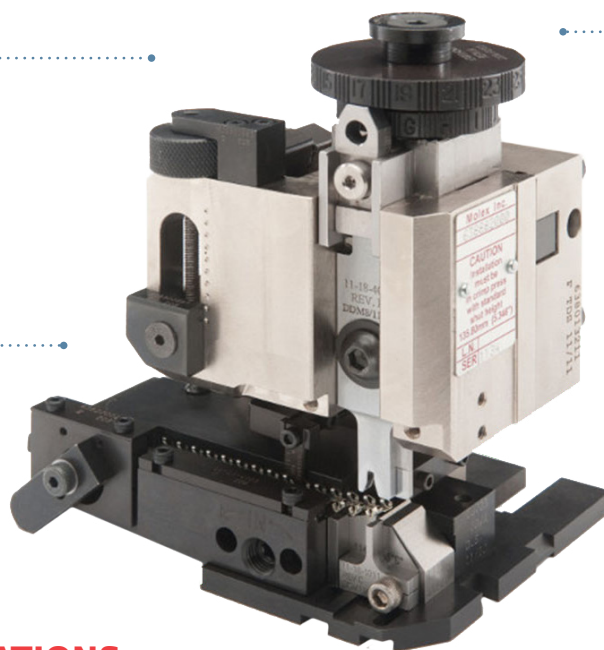

Applicator designed with mounting and shut height of 135.80mm (5.35")
Meets the industry standard

Independent adjustment rings

Allow users to quickly adjust the conductor or insulation crimp heights without affecting each other

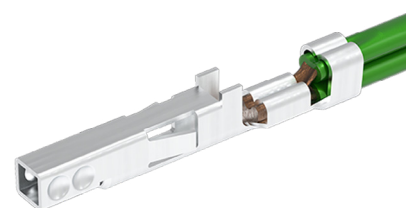

MARKETS AND APPLICATIONS

Automotive

Harness manufacturers
Non-sealed applications
Inside devices

Commercial Vehicle

Electronic control modules

Consumer

Gaming equipment
Gaming machines
Vending machines

Data/Computing

Copiers
Printers

Home Appliance

White goods

Industrial/Industrial Automation

Automation equipment
Food and beverage dispensers
Medical
Medical devices
X-rays machines

Telecommunications/Networking

Routers and switches
Servers
Backplanes
Fan-tray assemblies
Rack-mount servers



White Goods



Robotic Arm



Robotic Floor Vacuum

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Россия +7(495)268-04-70

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Казахстан +7(7172)727-132

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (812)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Киргизия +996(312)96-26-47

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Terminal Series No.	Terminal Order No.			Wire					Strip Length	
				UL Type	Combinations	AWG	Insulation Diameter (per wire)			
	mm	In.	mm				In.			
5556	39-00-0077	39-00-0079	39-00-0089	1007	20+22 AWG	20	1.70 to 1.80	0.067 to 0.071	3.00 to 3.50	0.118 to 0.138
	39-00-0093	39-00-0112	39-00-0118			22	1.57 to 1.65	0.061 to 0.065		
	39-00-0141	39-00-0157	39-00-0167	1061	20+22 AWG	20	1.42 to 1.45	0.055 to 0.057		
	39-00-0173	39-00-0179	39-00-0185			22	1.22 to 1.27	0.048 to 0.050		
	39-00-0198	39-00-0204	39-00-0211	1007	20+20 AWG	20	1.70 to 1.80	0.067 to 0.071		
	39-00-0217	39-00-0447	-	1061	20+20 AWG	20	1.42 to 1.45	0.055 to 0.057		
5558	39-00-0081	39-00-0083	39-00-0095	1007	18+22 AWG	18	2.01 to 2.03	0.079 to 0.080		
	39-00-0099	39-00-0124	39-00-0130			22	1.57 to 1.65	0.061 to 0.065		
	39-00-0147	39-00-0223	39-00-0449	1061	18+22 AWG	18	1.68 to 1.70	0.066 to 0.067		
	98-00-0176	40-01-0855	-			22	1.22 to 1.27	0.048 to 0.050		
	Description									
203702	Fine Adjust Applicator for Mini-Fit Double Crimp Applications									
*Wires should be presented vertically. Double wire combinations may not pass IPC/WHMA-A-620 insulation crimp.										

Mini-Fit Jr. Double Crimp Tools >

ORDERING INFORMATION

Products: Mini-Fit Jr. Double Crimp Terminals 22+22 AWG

Use with: Series 5556 and 5558

Terminal Series No.	Terminal Order No.			Wire					Strip Length	
				Combinations	AWG	UL Type	Insulation Diameter (per wire)			
							mm	In.	mm	In.
5556	39-00-0038	39-00-0055	39-00-0059	22+22 AWG	22	1007	1.57 to 1.65	0.061 to 0.065	3.00 to 3.50	0.118 to 0.138
	39-00-0073	39-00-0108	39-00-0114							
	39-00-0153	39-00-0163	39-00-0169							
	39-00-0175	39-00-0181	39-00-0194							
	39-00-0200	39-00-0207	39-00-0213							
	39-00-0405	39-00-4207	39-00-0410							
	39-00-0419	39-00-0425	39-00-0428							
	39-00-0436	39-00-0440	40-13-0851							
5558	39-00-0040	39-00-0053	39-00-0061			1061	1.22 to 1.27	0.048 to 0.050		
	39-00-0075	39-00-0120	39-00-0121							
	39-00-0120	39-00-0121	39-00-0126							
	39-00-0219	39-00-0411	39-00-0420							
	39-00-0426	39-00-0427	39-00-0120							
	39-00-0437	40-01-0853	40-13-0853							
	98-00-0174	-	-							
	Description									
203702	Fine Adjust Applicator for Mini-Fit Double Crimp Applications									
*Wires should be presented vertically. Double wire combinations may not pass IPC/WHMA-A-620 insulation crimp.										

*Wires should be presented vertically. Double wire combinations may not pass IPC/WHMA-A-620 insulation crimp.

Алматы (7273)495-231
 Ангартск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81
 Россия +7(495)268-04-70

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47
 Казахстан +7(7172)727-132

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Саранск (8342)22-96-24
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35
 Киргизия +996(312)96-26-47

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

<https://molex.nt-rt.ru/> || mxd@nt-rt.ru